



► INDUSTRY ► RESIDENTIAL ► AGRICULTURE ► IRRIGATION

Pressure in pipeline Not in your life



4/3 OF Series Borewell Submersible Oil filled Pumps



4/3 OF Series Borewell Submersible Oil filled Pumps



High Grade Electrical Stamping

Reduces electrical losses and improves pump efficiency



Anti-Rust CED Coating

Offers rust free and stuck free operation



Reliable Mechanical Seal

High quality and long life mechanical seal



High Quality Noryl

High quality virgin noryl components give longer life



Easy for Maintenance

Simple construction, easily replaceable wear and tear parts

Technical Specifications:







- Range: 0.5 HP to 3.0 HP (0.37 kW to 2.5 kW)
- Rated voltage: 220V 1-Phase
- Voltage range: 180V-240V
- Rated Frequency: 50Hz
- Delivery pipe size: 32 mm to 62 mm
- Max. Head: Upto 132 meter
- Max. Discharge: Upto 250 LPM
- Liquid: Clear water
- Motor type: Oil filled motor

Application:

- Gardening
- Sprinkler irrigation
- Multistoried buildings
- Water supply for domestic and industrial application
- Drip irrigation
- Construction site




Performance Curve:

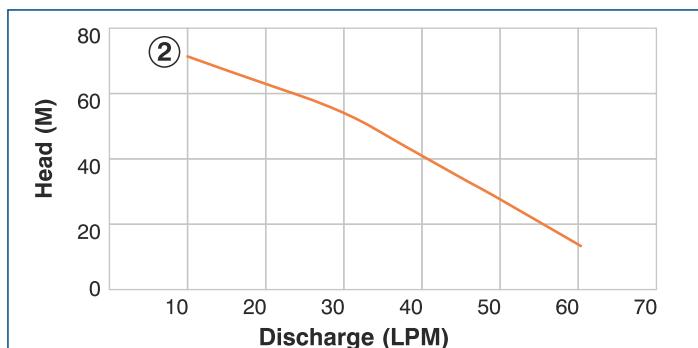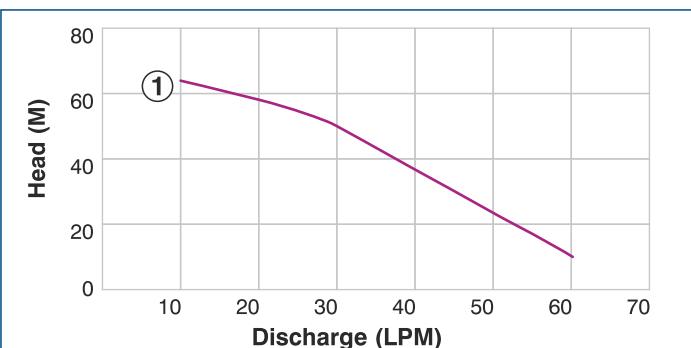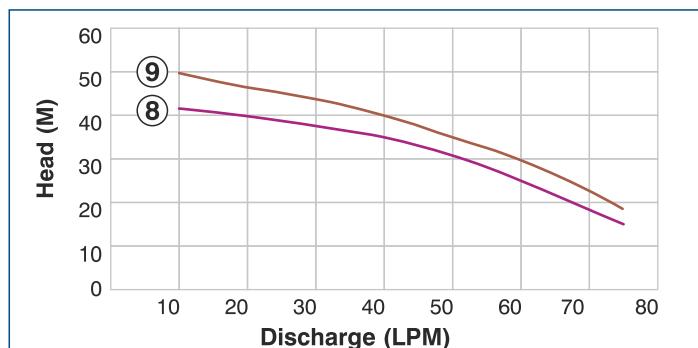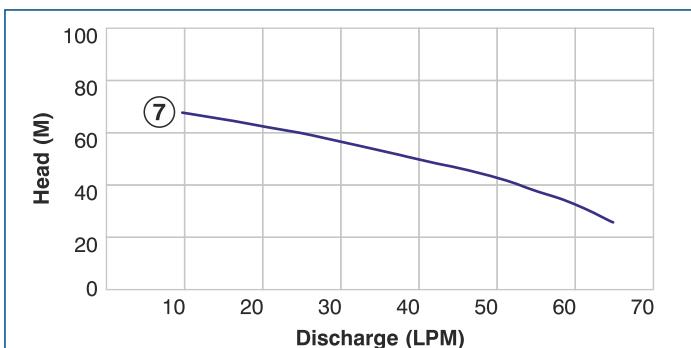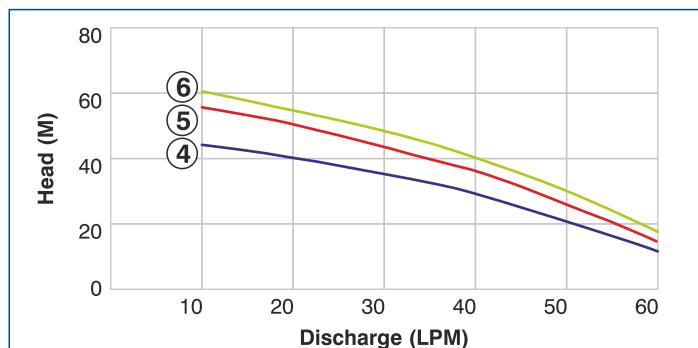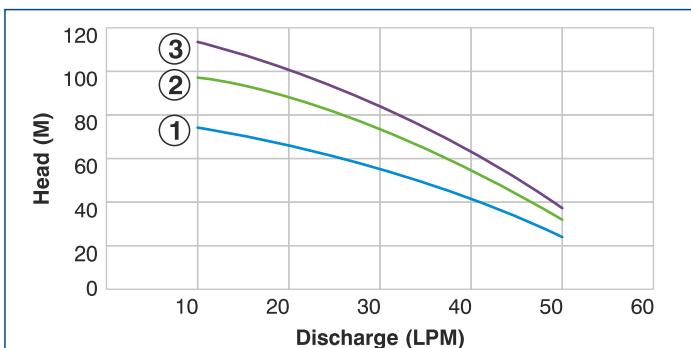

Material of Construction:

No.	Part	Material
1	Bowl	Noryl
2	Impeller	Noryl
3	Pump Shaft	Stainless Steel-SS410
4	NRV	Cast Iron Grade FG 200
5	Suction Housing	Cast Iron Grade FG 200
6	Motor body	Stainless Steel-SS202
7	Upper & Lower Housing, Motor Base	Cast Iron Grade FG 200
8	Stamping	CRNGO-M47
9	Bearing Bush	Bronze LTB-4
10	Fasteners	Stainless Steel-SS410
11	Strainer	Stainless Steel-SS202
12	Sealing	Oil Seal

Pump Dimensional Details:

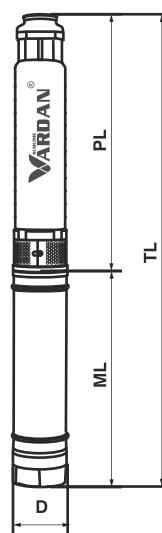

Smart and Reliable Pumping Solutions



Follow Us On



SUBLIME INDUSTRIES

P NO.20/21,G NO.48,SEC-23
33 FEET ROAD,FARIDABAD,
HARYANA(INDIA)-121005

📞 +91 9873907242
✉️ sales@sublimeindustries.in
🌐 www.sublimeindustries.in