



► INDUSTRY ► RESIDENTIAL ► AGRICULTURE ► IRRIGATION

Pressure in pipeline Not in your life



4/3 WF Series Borewell Submersible Water filled Pumps



4/3 WF Series Borewell Submersible Water filled Pumps



High Grade Electrical Stamping

Reduces electrical losses and improves pump efficiency



In Built Check Valve

In built check valve prevents pump parts from damage due to sudden back pressure



High Thrust Capacity

Specially designed thrust bearing ensures highest reliability



High Quality Noryl

High quality virgin noryl components give longer life



Easy for Maintenance

Simple construction, easily replaceable wear and tear parts

Technical Specifications:







- Range: 0.5 HP to 3.0 HP (0.37 kW to 2.5 kW)
- Rated voltage: 220V for 1PH
- Voltage range: 180V-240V
- Rated Frequency: 50Hz
- Delivery pipe size: 32 mm
- Max. Head: Upto 114 meter
- Max. Discharge: Upto 75 LPM
- Liquid: Clear water
- Motor type: Water filled motor

Application:

- Gardening
- Sprinkler irrigation
- Multistoried buildings
- Water supply for industrial
- Drip irrigation
- Construction sites




Performance Curve:

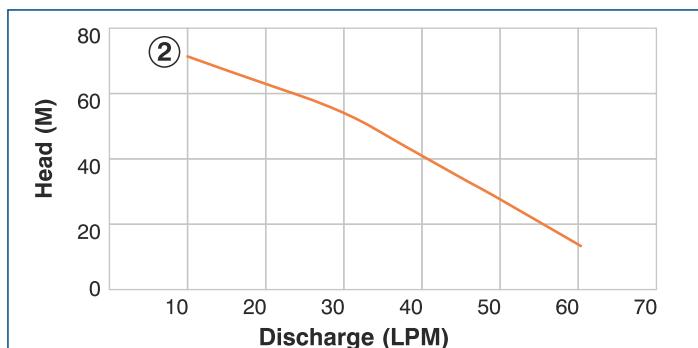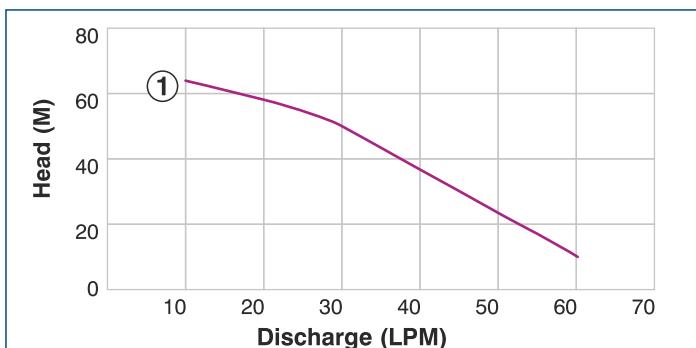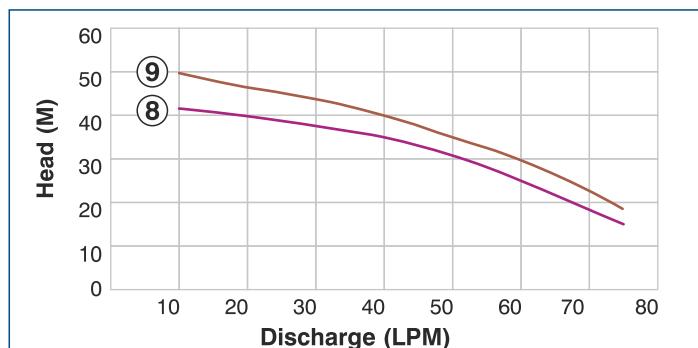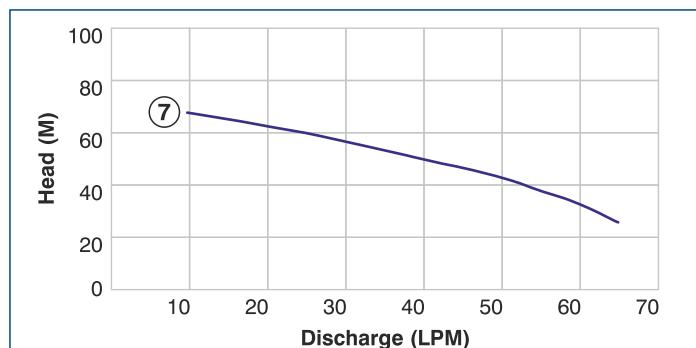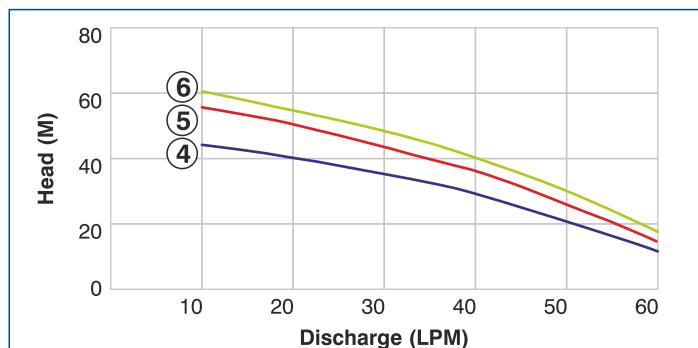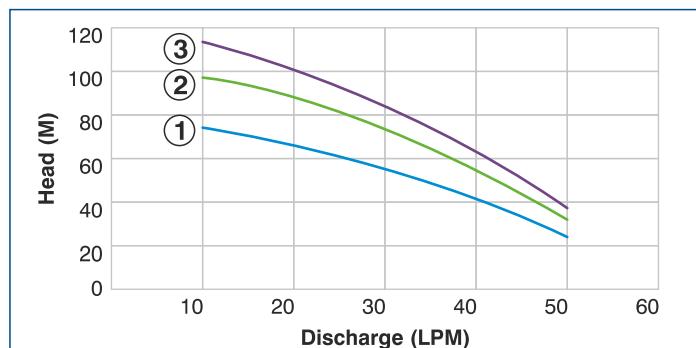

Material of Construction:

No.	Part	Material
1	Bowl	Noryl
2	Impeller	Noryl
3	Pump Shaft	Stainless Steel-SS410
4	NRV	Cast Iron Grade FG 200
5	Suction Housing	Cast Iron Grade FG 200
6	Motor body	Stainless Steel-SS202
7	Upper & Lower Housing, Motor Base	Cast Iron Grade FG 200
8	Stamping	CRNGO-M47
9	Bearing Bush	Bronze LTB-4
10	Fasteners	Stainless Steel-SS410
11	Strainer	Stainless Steel-SS202
12	Sealing	Oil Seal

Pump Dimensional Details:

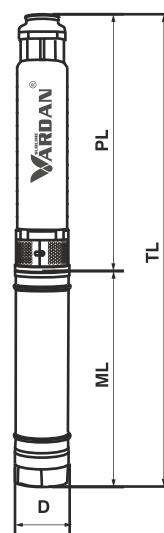

Smart and Reliable Pumping Solutions



Follow Us On



SUBLIME INDUSTRIES

P NO.20/21,G NO.48,SEC-23
33 FEET ROAD,FARIDABAD,
HARYANA(INDIA)-121005

📞 +91 9873907242
✉️ sales@sublimeindustries.in
🌐 www.sublimeindustries.in